

SHDSL

TOTAL ACCESS® DSLAM OCTAL SHDSL ACCESS MODULE

PRODUCT FEATURES

- Eight individually configurable ports
- Rate/range adaptability for most efficient use of bandwidth
- Symmetrical data transfer for applications requiring equivalent transmission speeds, upstream and downstream
- Data-rate improvement of 35 to 45 percent over traditional solutions
- Reach improvement of 15 to 20 percent over traditional solutions
- Robust loop performance for dependable service
- Spectral compatibility for operation alongside other DSLs
- Low power dissipation for cost-effective operation
- Includes industry-leading 10-year warranty

ADTRAN's Octal SHDSL module provides high density, low-cost deployment of eight (8) industry-standard SHDSL interfaces. SHDSL is the most functional, standards-based Digital Subscriber Line (DSL) technology developed to date. Resulting from the convergence of the best features of traditional DSL technologies, SHDSL incorporates rate/range adaptability, spectral compatibility, impairment tolerance, and high-speed symmetric deployment. SHDSL is particularly suited for business-based voice and data applications such as multiple voice-line delivery, Internet access, and remote LAN access.

The Octal SHDSL module is another addition to ADTRAN's Total Access DSLAM architecture. The Total Access DSLAM utilizes the Enhanced System Controller Unit (ESCU) and the DS3 Cell Switch Module (DS3 CSM) configured in the same chassis as ADTRAN's field-proven Total Access Broadband platform. The DS3 CSM receives and routes ATM traffic from the network to the SHDSL module for transmission over the loop.

The Octal SHDSL module occupies one slot in the Total Access DSLAM shelf allowing 224 subscribers per single chassis. Each SHDSL port is individually configurable and supports rates from 192 Kbps to 2.304 Mbps over a single copper pair. The front faceplate is equipped with an LED for each port for quickly determining circuit status.

Each SHDSL circuit utilizes the Trellis Coded Pulse Amplitude Modulation (TC PAM) line code scheme ensuring spectral compatibility with existing binder group services. ADTRAN's SHDSL module is 100 percent compliant with the ITU Standard for SHDSL transmission (G.991.2) for interoperability with other standards-based SHDSL products.

The Total Access system offers several methods for user-friendly operation, administration, maintenance, and provisioning of the entire SHDSL circuit. SNMP management using ADTRAN's Element Management System (EMS) or other SNMP-based systems is provided via the 10BaseT connection on the Total Access DSLAM shelf. A VT100 interface on the front of the ESCU provides easy access to the module menu screens.

CORPORATE OFFICE

ADTRAN, Inc.
 901 Explorer Boulevard
 P.O. Box 140000
 Huntsville, AL 35814-4000

800 9ADTRAN
 256 963-8000
 fax: 256 963-7916
 fax back: 256 963-8200
 e-mail: info@adtran.com
 web site: www.adtran.com

REGIONAL OFFICES

Dallas, TX
 800 471-8648

Denver, CO
 800 471-8651

Irvine, CA
 800 788-5408

Kansas City, KS
 800 471-8649

Philadelphia, PA
 800 471-8656

San Antonio, TX
 888 223-7671

INTERNATIONAL CONTACTS

Beijing, China
 8610 8529-8895

Canada
 877 923-8726

Germany
 49 6007 930-203

Hong Kong
 852 2824-8283


Latin America
 954 474-4424

London, U.K.
 44 1252 626-730

Melbourne, Australia
 61 3 9658-0500

Mexico/Caribbean
 954 577-0357

Zürich, Switzerland
 41 1 880-2777

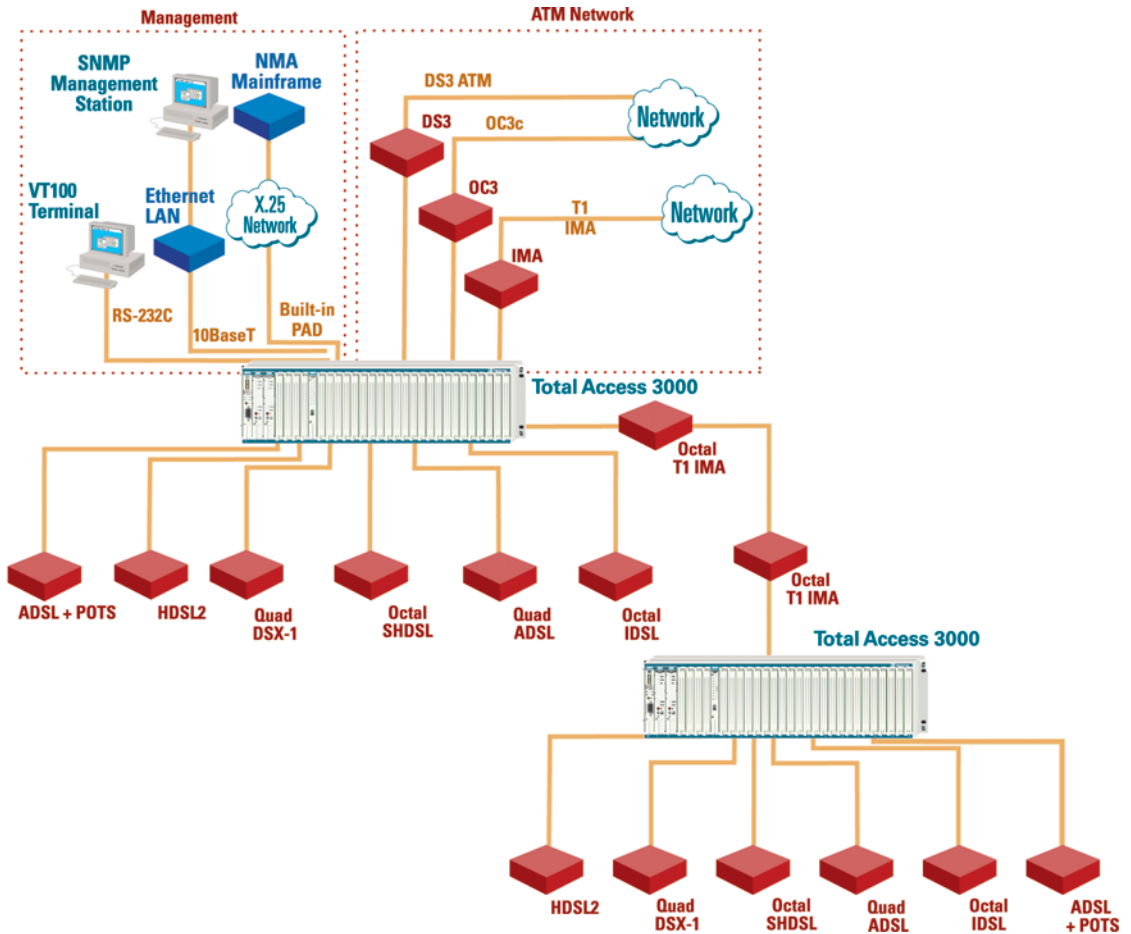

Product Specifications

FACEPLATE FEATURES

Indicators

- Power LED
- Eight (8) SHDSL port indicators

MECHANICAL

- **Dimensions:** 5.20 in. H x 0.790 in. W x 10 in. D
- **Weight:** Less than 1 lb.
- **Mounting:** Occupies a single access module slot in the Total Access DSLAM 23 in. chassis

INTERFACES

- **Network Interface:** ATM upstream through the Cell Switch Module
- **Subscriber Interface:** SHDSL

ELECTRICAL

- **Power Requirements:** -42 VDC to -56 VDC input range

REGULATORY STANDARDS

- NEBS Level 3
- GR-1089-CORE
- UL 1950

MANAGEMENT

- Craft interface, SNMP, TL1

ENVIRONMENTAL

- **Operating:** -40°C to +65°C
- **Storage:** -40°C to +85°C
- **Relative Humidity:** Up to 95 percent, noncondensing

Ordering Information

EQUIPMENT	PART #
Octal SHDSL Access Module	1181403L1

Specifications subject to change without notice.



I.S. EN ISO 9001
 ADTRAN is an ISO 9001 registered company.

