



# QUAD BRI

## ATLAS 550 MODULE

### PRODUCT FEATURES



- Four basic rate ISDN U interfaces
- LT mode and NT mode support
- ANSI T1.601 compliant
- Compliant with Lucent 5ESS, Nortel DMS100, and National ISDN
- Near-end and far-end block error monitoring
- Maximum distance of 18,000 feet
- Flash upgradable
- Occupies a single user slot in the ATLAS 550 chassis
- Hot swappable
- Standard 5-year warranty

ATLAS includes an advanced access architecture for switching dial-up calls to specific ports or DS0s. The Quad Basic Rate ISDN (BRI) Module contains four ISDN U interfaces and combines with other ATLAS 550 components to implement an ISDN access switch. The Quad BRI Module can connect to the ISDN network (NT mode), or it can emulate the ISDN network to other ISDN access devices (LT mode) that support the U Interface, such as terminal adapters and network termination units.

As a component in an ATLAS 550 access switching application, the Quad BRI Module can consolidate multiple Basic Rate ISDN (BRI) connections onto T1/PRI access lines. The module also supports BRI-to-BRI, BRI-to-PRI, and PRI-to-PRI switching. In addition, the ATLAS 550 can convert between ISDN D channel (PRI or BRI) and T1 robbed bit signaling, allowing non-ISDN equipment to access a more efficient PRI or BRI facility. Moreover, the module's call filtering feature allows you to program on a per-user basis, the call types that will be answered and originated.

The Quad BRI module can be configured through a variety of mechanisms, including Telnet or VT 100 emulation. SNMP management is supported for alarm and event reporting.

The Quad BRI Module includes an extensive array of diagnostic tools to assist in identifying and correcting network problems including a built-in Self-Test utility, local and remote loopback testing for B1, B2, and 2B+D, and performance monitoring to ensure the quality of the ISDN line.

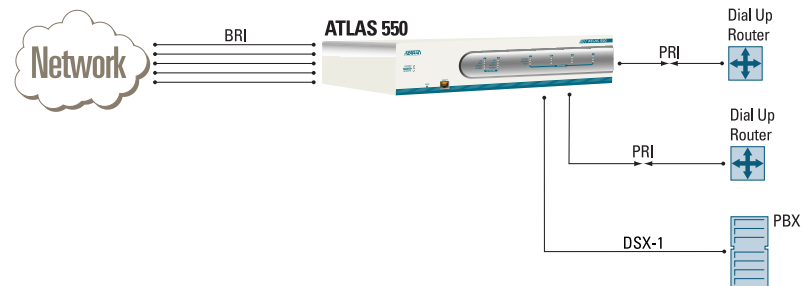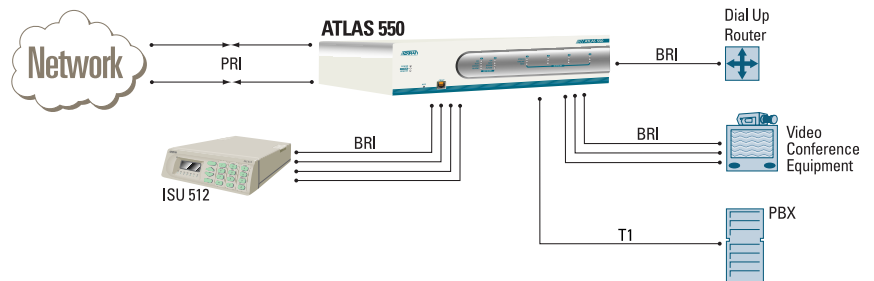

## CORPORATE OFFICE

ADTRAN, Inc.  
901 Explorer Boulevard  
P.O. Box 140000  
Huntsville, AL 35814-4000

800 9ADTRAN  
256 963-8000  
fax: 256 963-8699  
fax back: 256 963-8200  
e-mail: info@adtran.com  
web site: www.adtran.com

## REGIONAL OFFICES

Chicago, IL 800 436-4217  
Seattle, WA 800 390-1573  
Washington, DC 800 794-9798

## FIELD OFFICES

Atlanta, GA 800 289-0966  
Chicago, IL 800 471-8655  
Columbus, OH 888 865-2237  
Dallas, TX 800 471-8648  
Denver, CO 800 471-8651  
Irvine, CA 800 788-5408  
Kansas City, KS 800 471-8649  
Los Angeles, CA 888 223-7668  
Nashville, TN 888 223-7657  
New York, NY 800 471-8657  
Portland, OR 888 223-7660  
Richmond, VA 800 689-9915  
San Jose, CA 888 223-7655

## INTERNATIONAL CONTACTS

Asia Pacific/Australia  
852 2824-8283 (Hong Kong)  
Canada  
800 232-6811  
Caribbean/Latin America  
954 746-5355  
All other International inquiries  
256 963-2500



I.S. EN ISO 9001

ADTRAN is an ISO 9001 registered company.



Printed in the U.S.A. on recycled paper.  
61200315L1-8A May 2000  
©2000 ADTRAN, Inc. All rights reserved.

# Product Specifications

## ISDN INTERFACE

- ANSI T1.601-1992 2B1Q U Interface

## PHYSICAL INTERFACE

- 4-Pin Modular RJ-45

## BRI LINE RATE

- 2B+D, 160 kbps full duplex

## U-INTERFACE DISTANCE

- 18,000 feet with 1,300 Ohm resistance design

## SWITCH COMPATIBILITY

- Lucent 5ESS, Nortel DMS-100, National ISDN

## TERMINATION MODES

- LT (Network Emulation)
- NT (DCE)

## DIAGNOSTICS

- Self-test
- B1, B2, & 2B+D Local and Remote Loopbacks

## PERFORMANCE MONITORING

- Near-End Block Errors (NEBES), & Far-End Block Errors (FEBES)

## AGENCY APPROVALS

- FCC Part 15, Class A, FCC Part 68, UL, Canadian UL (CUL), Industry Canada CS-03

## ENVIRONMENT

- Operating Temperature: 0° to 45°C, (32° to 113°F)
- Storage Temperature: -20° to 70°C, (-4° to 158°F)
- Relative Humidity: Up to 95%, non-condensing

## POWER

- 2.0 Watts

## PRODUCT INCLUDES

- Four RJ-45 to RJ-11 cables (7 feet) and user manual

# Ordering Information

EQUIPMENT	PART #
Quad BRI Module .....	1200315L1



Specifications subject to change without notice.